

Bradley

AUSTRALIA

customised excellence

www.bradleyaustralia.com

MODEL 832H-102-51

CHANGING PLACES DROP DOWN GRAB RAIL LOCKING IN UP POSITION

Options:

51 with toilet roll holder

Powder Coat white and Matte Black




PRODUCT FEATURES:

- Satin finish stainless steel
- Surface mounted
- Locks in the 'up' position
- Holds up to 150kg

Back Plate Dimensions
100mm W x 300mm H
Unit Projects 850mm

- 850mm long

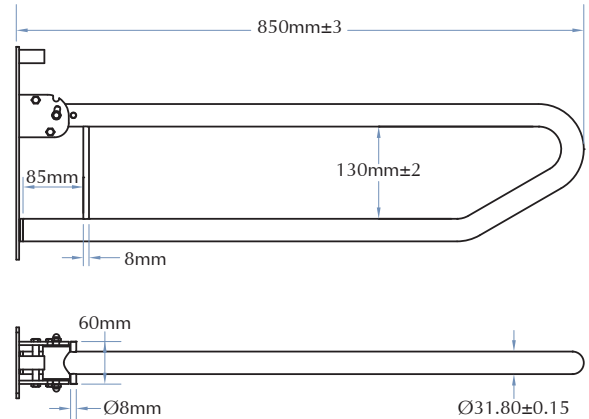

PRODUCT DATA:

CONSTRUCTION:

TUBING: Fabricated of type 304 (18-8), 32mm (1-1/4") O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Bent ends of tubing pass through the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the grab rail. All welds ground and polished to blend. Mandrel bending process maintains uniform rail diameter. Rubber bumper to stop rail hitting the wall when in upright position.

STRENGTH:


When properly mounted, all Bradley heavy duty grab rail systems meet or exceed the requirements of Changing Places design specifications 2020.

INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use rail as template to locate mounting holes. Drill holes and set anchors as appropriate. Mount grab rail and secure mounting screws. Screws not provided.





GUIDE SPECIFICATION:

Grab rail shall be fabricated of type 304 satin finish stainless steel with concealed mounting flanges in sizes and configurations as indicated.

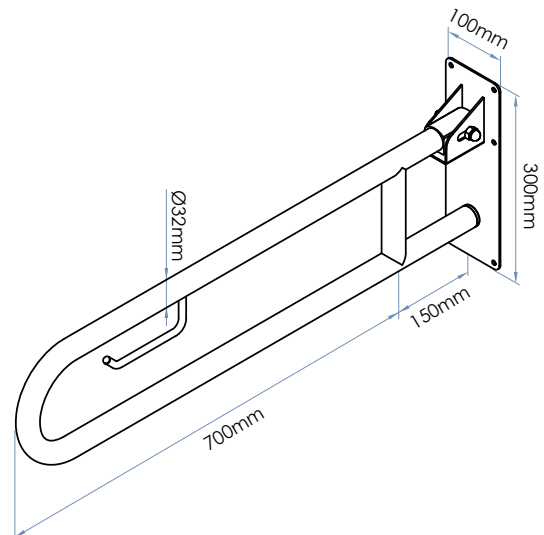

832H-102-51

DROP DOWN GRAB RAIL LOCKING IN UP POSITION

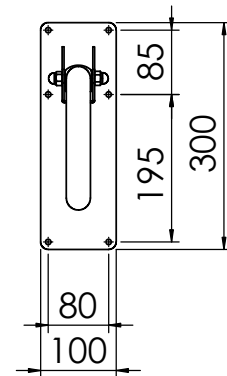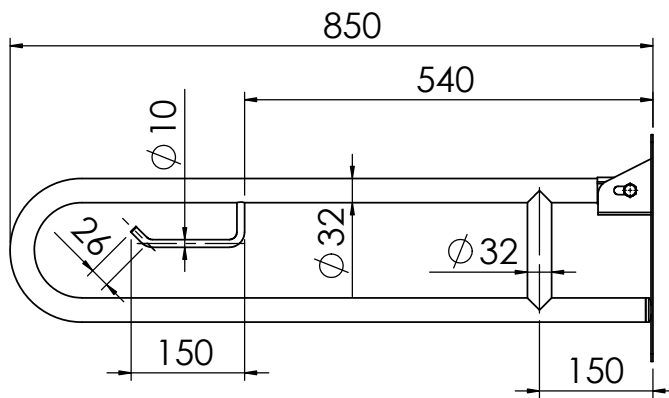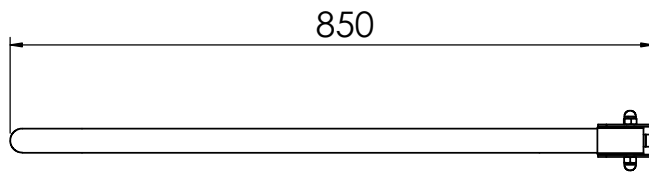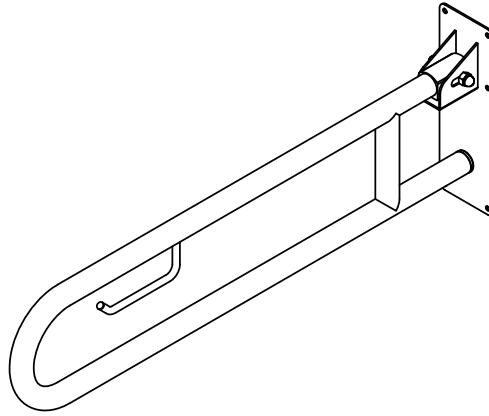

Bradley
AUSTRALIA
customised excellence

DWG NO.

832H-102-51

APPROVED BY:

Proudly customised design please approve

SCALE:1:10