



PRODUCT FEATURES:

- Matte black finish stainless steel
- Surface mounted
- Right and left hand interchangeable
- 32mm diameter
- Concealed fixing
- AS 1428.1 compliant
- Overall dimensions of 435mm W x 435mm H x 87mm D

PRODUCT DATA:

CONSTRUCTION:

FLANGES: Fabricated of type 304 (18-8), 80mm dia. 13 gauge stainless steel.

ESCUTCHEONS: Fabricated of type 304 (18-8), 22 gauge stainless steel. One-piece drawn construction with exposed surfaces in matt black finish. Snap over flanges to conceal mounting screws. **TUBING:** Fabricated of type 304 (18-8), 32mm (1-1/4") O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in matt black finish. Bent ends of tubing pass through the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the grab rail. All welds ground and polished to blend. Mandrel bending process maintains uniform rail diameter.

STRENGTH:


When properly mounted, all Bradley heavy duty grab rail systems meet or exceed the requirements of Australian Standard AS 1428.1


INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use rail as template to locate mounting holes. Drill holes and set anchors as appropriate. Mount grab rail and secure mounting screws. Snap escutcheons into place.


GUIDE SPECIFICATION:

Ambulant grab rail shall be fabricated of type 304 stainless steel powder coated in Matte Black finish, with concealed mounting flanges in 75mm D and overall dimensions of 435mm x 435mm configuration as indicated.

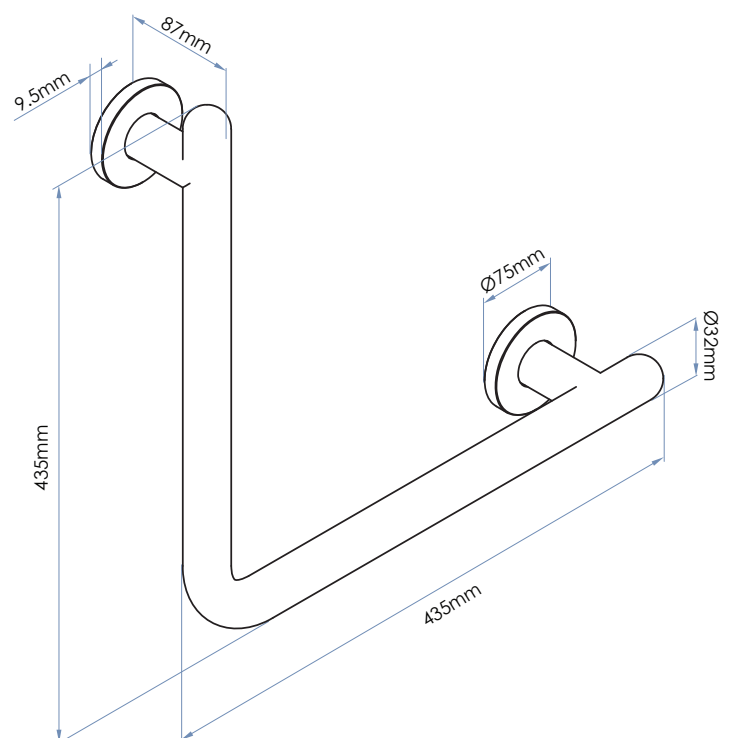

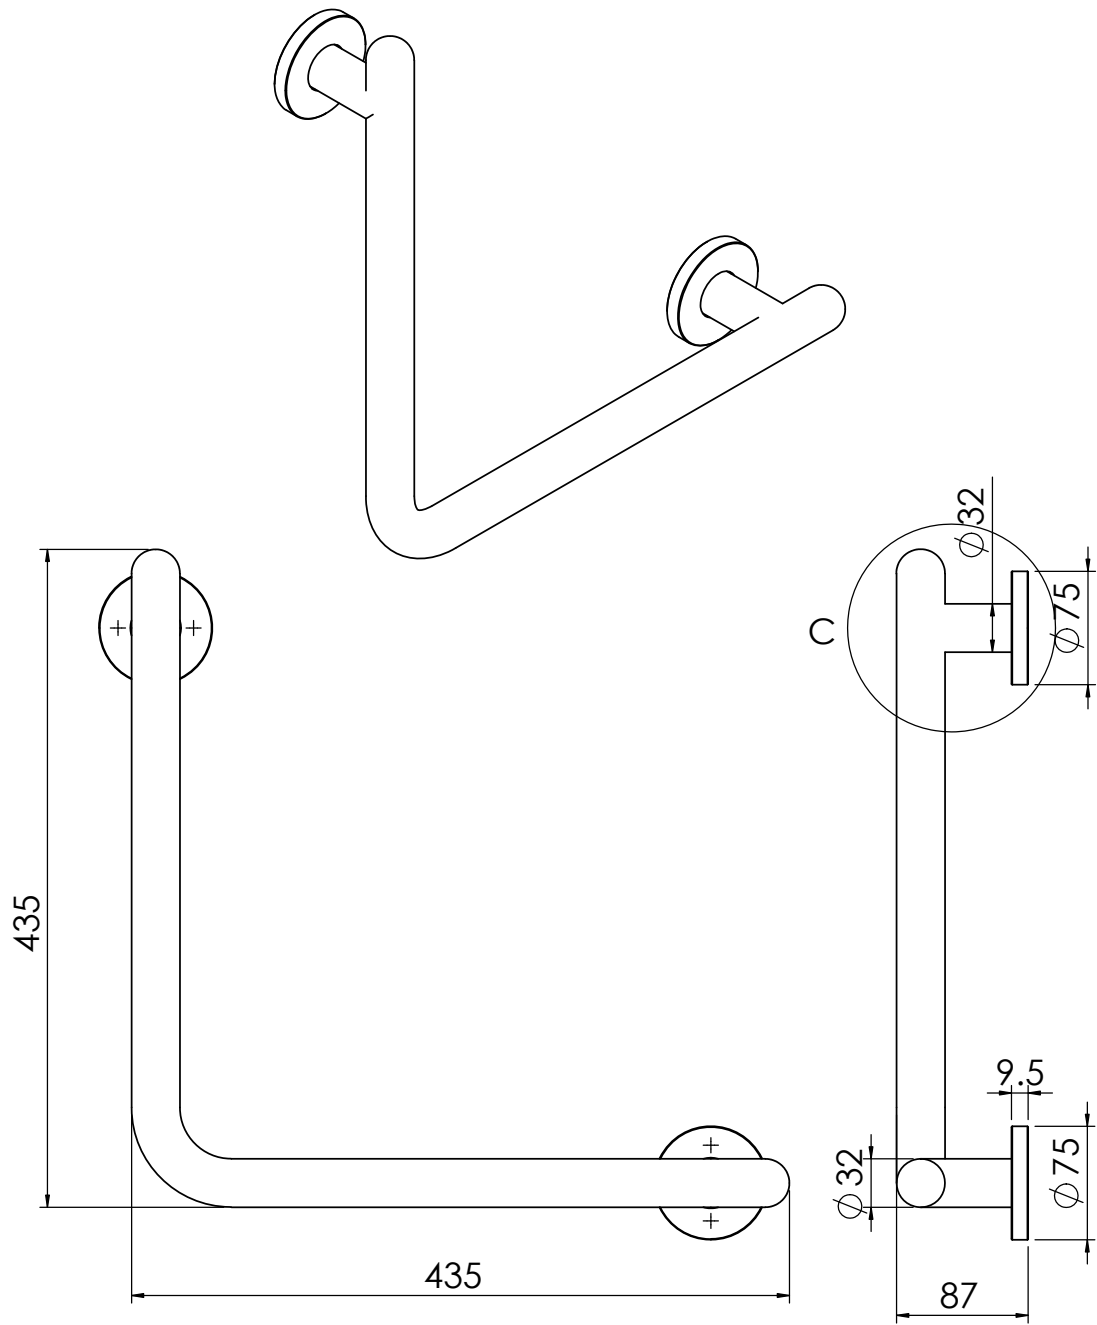

DETAIL C
SCALE 2 : 5

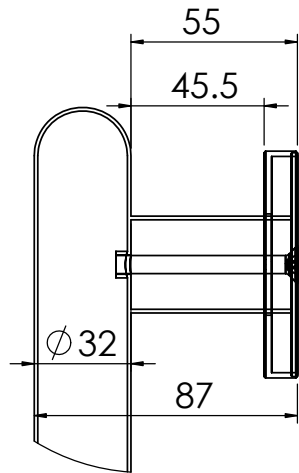

Bradley

DWG NO.	SR006-AMB-MB
APPROVED BY:	
Proudly customised design please approve	SCALE:1:5